

There's always a solution in steel.

AISC Live Webinars

Thank you for joining our live webinar today.
We will begin shortly. Please stand by.

Thank you.

Need Help?

Call ReadyTalk Support: 800.843.9166



AISC Live Webinars

Today's audio will be broadcast through the internet.

Alternatively, to hear the audio through the phone, dial:

(800) 289-0459

Passcode: 664417



AISC Live Webinars

Today's live webinar will begin shortly. Please stand by.

As a reminder, all lines have been muted. Please type any questions or comments through the Chat feature on the left portion of your screen.

Today's audio will be broadcast through the internet.
Alternatively, to hear the audio through the phone, dial:

(800) 289-0459

Passcode: 664417



AISC Live Webinars

AISC is a Registered Provider with The American Institute of Architects Continuing Education Systems (AIA/CES). Credit(s) earned on completion of this program will be reported to AIA/CES for AIA members. Certificates of Completion for both AIA members and non-AIA members are available upon request.

This program is registered with AIA/CES for continuing professional education. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the AIA of any material of construction or any method or manner of handling, using, distributing, or dealing in any material or product.

Questions related to specific materials, methods, and services will be addressed at the conclusion of this presentation.



AISC Live Webinars

Copyright Materials

This presentation is protected by US and International Copyright laws. Reproduction, distribution, display and use of the presentation without written permission of AISC is prohibited.

© The American Institute of Steel Construction 2018

The information presented herein is based on recognized engineering principles and is for general information only. While it is believed to be accurate, this information should not be applied to any specific application without competent professional examination and verification by a licensed professional engineer. Anyone making use of this information assumes all liability arising from such use.



Course Description

Steel Framed Stairway Design

Part 1: Overview & Gravity Loading

May 30, 2018

This session provides guidance for the design and layout of steel elements for steel framed stairways, guards, handrail and related components. Information regarding stairways, code requirements for gravity loading and serviceability criteria, design methods, and design examples will be presented.



Learning Objectives

- Name the various components of steel framed stairs.
- List the types of stair classes and their characteristics.
- Identify the critical code provisions for creating a stair layout.
- Explain the structural code requirements for gravity load design of stairs for both strength and serviceability.



Steel Framed Stairway Design



Presented by
Adam Friedman
CSD Structural Engineers
Milwaukee, WI




There's always a solution in steel.

Introduction

AISC Design Guide 34: Steel Framed Stairway Design

to be published late summer / fall

will be available at
www.aisc.org/designguides
free download for members or
available for purchase

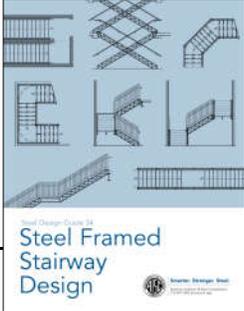

9

Outline – Part 1

- Step 1 – Purpose & Design Philosophy
- Step 2 – Stairway Overview
- Step 3 – Code Requirements - Gravity
- Step 4 – Stairway Design
- Step 5 – Members & Connx
- Step 6 – Examples

10

Outline – Part 2

- Step 7 – Code Requirements – Seismic Loading
- Step 8 – Seismic Serviceability
- Step 9 – Stairway Design
- Step 10 – Examples
- Step 11 – Delegated Design
- Step 12 – Other Topics

11

Outline – Part 1

- Step 1 – Purpose & Design Philosophy
- Step 2 – Stairway Overview
- Step 3 – Code Requirements - Gravity
- Step 4 – Stairway Design
- Step 5 – Members & Connx
- Step 6 – Examples

12

Purpose for Design Guide

- Improve communication & coordination
- Resolve common issues:
 - Inadequate or incorrect stairway dimensions
 - Unclear code criteria for project
 - Insufficient information in design documents
 - Coordination of support locations
 - Contractual concerns / delegated design



13

Design Philosophy

- Follow code & NAAMM *Stair Manual & Railing Manual*:
 - General Stair & Rail Layout
 - Construction Details (various materials)
 - Design Criteria may be out of date
- For steel stairs, the new Design Guide provides specific layout, details, design methods, and recommendations related to stairways, handrails, and guards fabricated from steel.
 - Provides the most up-to-date guidance for steel stair design



14

Design Philosophy

- AISC *Code of Standard Practice (COSP)* defines stairs and handrail as “other items”, therefore these items are outside the scope of the COSP since it is not considered structural steel.
- But, for steel stairway design, use AISC documents as “reference standards” instead:
 - AISC 2016 *Code of Standard Practice (COSP)*
 - AISC *Steel Construction Manual, 15th Ed. (Manual)*
 - AISC 2016 *Specification for Structural Steel Buildings (Specification)*



15

Design Philosophy

- Use AISC documents in conjunction with design documents for steel stair design but confirm with:
 - Architect of Record (AOR)
 - Structural Engineer of Record (SER)
 - Authority Having Jurisdiction (AHJ)
 - General Contractor (GC)



16

Outline – Part 1

Step 1 – Purpose & Design Philosophy

Step 2 – Stairway Overview

Step 3 – Code Requirements - Gravity

Step 4 – Stairway Design

Step 5 – Members & Connx

Step 6 – Examples


17

Stair Types (NAAMM)

- Straight
 - **Straight**
 - Parallel (Switchback)
 - Angled
 - Scissor


18

Stair Types

- Straight
 - Straight
 - **Parallel (Switchback)**
 - Angled
 - Scissor


19


Stair Types

- Straight
 - Straight
 - Parallel (Switchback)
 - **Angled**
 - Scissor


20

Stair Types


- Straight
 - Straight
 - Parallel (Switchback)
 - Angled
 - **Scissor**

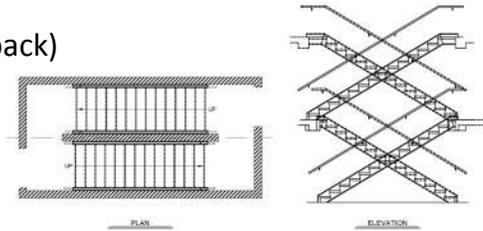

21

Stair Types


- Circular
- Curved

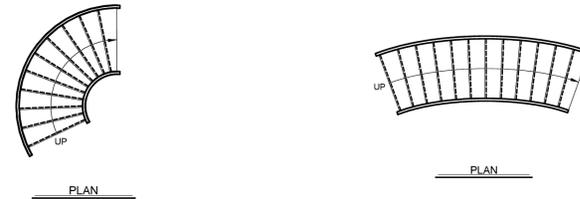

22

Stair Types

- Alternating Tread Device
- Ships Ladder

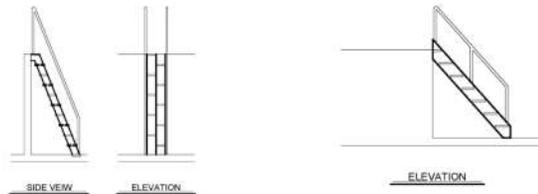

23

Stair Class (NAAMM)

- **Industrial**
 - functional
 - economical
 - industrial setting
- Service
- Commercial
- Architectural



24

Stair Class - Industrial



25

Stair Class - Industrial



26


Stair Class - Industrial



27


Stair Class

- Industrial
- **Service**
 - functional
 - “back of house”
 - common egress stair
- Commercial
- Architectural

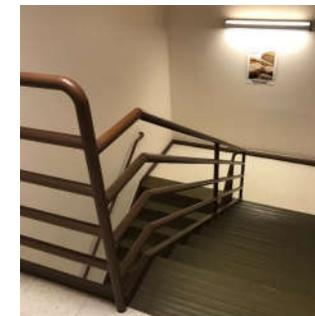

28

Stair Class - Service

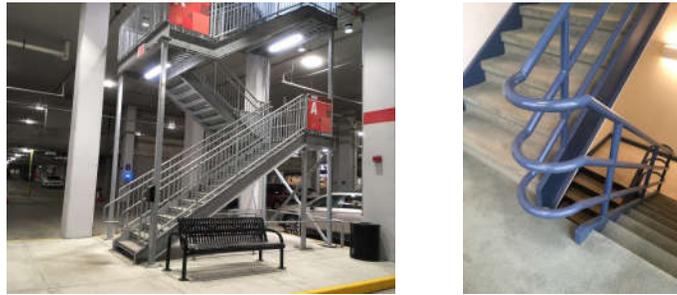

29

Stair Class

- Industrial
- Service
- **Commercial**
 - public use
 - more attractive
- Architectural



30


Stair Class - Commercial



31

Stair Class

- Industrial
- Service
- Commercial
- **Architectural**
 - elaborate
 - custom
 - most expensive

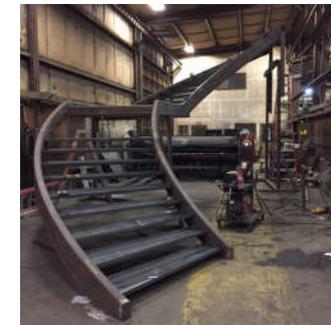

32


Stair Class - Architectural



33

Stairway Elements


- Tread
- Riser
- Stringer
- Landing
- Handrail
- Guard
- Supports
- Connections

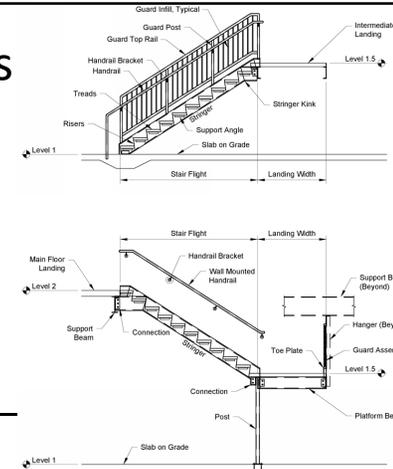

34

Stairway Elements


- **Tread**
- Riser
- Stringer
- Landing
- Handrail
- Guard
- Supports
- Connections

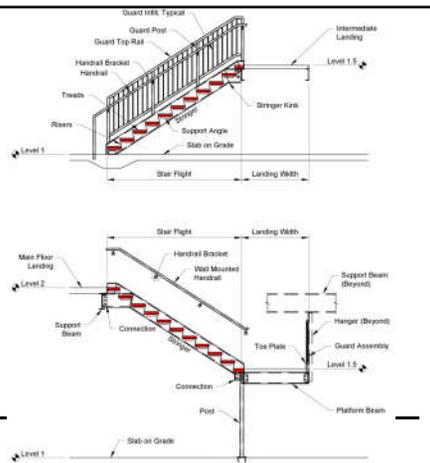

35

Stairway Elements


- Tread
- **Riser**
- Stringer
- Landing
- Handrail
- Guard
- Supports
- Connections

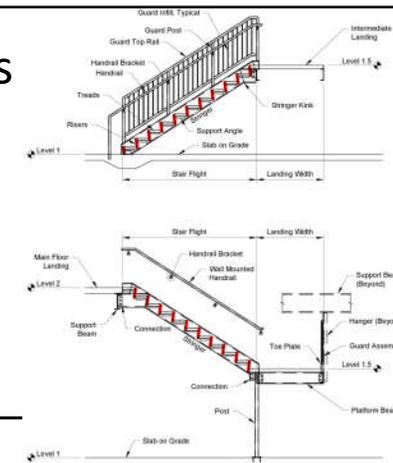


36

Stairway Elements

- Typical Tread / Riser Ass



“IBC” / Commercial




“OSHA” / Industrial


37

Stairway Elements


- Tread
- Riser
- **Stringer**
- Landing
- Handrail
- Guard
- Supports
- Connections

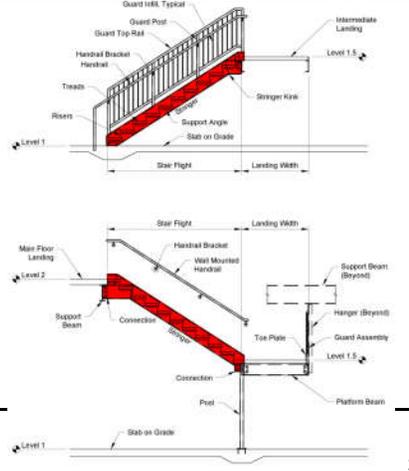


38

Stairway Elements


- Tread
- Riser
- Stringer
- **Landing**
- Handrail
- Guard
- Supports
- Connections

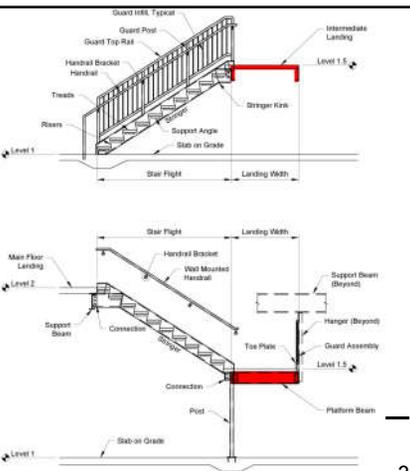


39

Stairway Elements

- Tread
- Riser
- Stringer
- Landing
- **Handrail**
- Guard
- Supports
- Connections

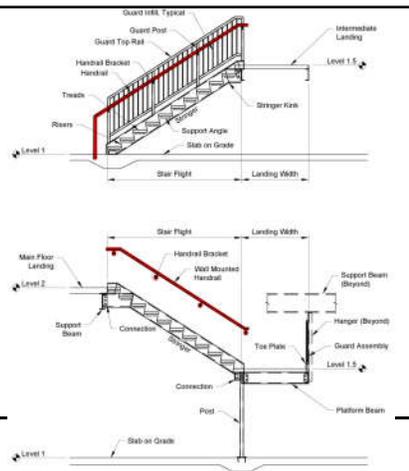


40

Stairway Elements

- Tread
- Riser
- Stringer
- Landing
- Handrail
- **Guard / "Stair Rail System"**
- Supports
- Connections

41

Stairway Elements

Guard

- Post
- Top Rail
- Low Rail
- Infill
- Toe Kick / Toeboard

42

Stairway Elements

Guard

- **Post**
- Top Rail
- Low Rail
- Infill
- Toe Kick / Toeboard

43

Stairway Elements

Guard

- Post
- **Top Rail**
- Low Rail
- Infill
- Toe Kick / Toeboard

44

Stairway Elements

Guard

- Post
- Top Rail
- **Low Rail**
- Infill
- Toe Kick / Toeboard

45

Stairway Elements

Guard

- Post
- Top Rail
- Low Rail
- **Infill**
- Toe Kick / Toeboard

46

Stairway Elements

Guard

- Post
- Top Rail
- Low Rail
- Infill
- **Toe Kick / Toeboard**

47


Stairway Elements

- Tread
- Riser
- Stringer
- Landing
- Handrail
- Guard
- **Supports**
- Connections

48

Stairway Elements

- Tread
- Riser
- Stringer
- Landing
- Handrail
- Guard
- Supports
- **Connections**

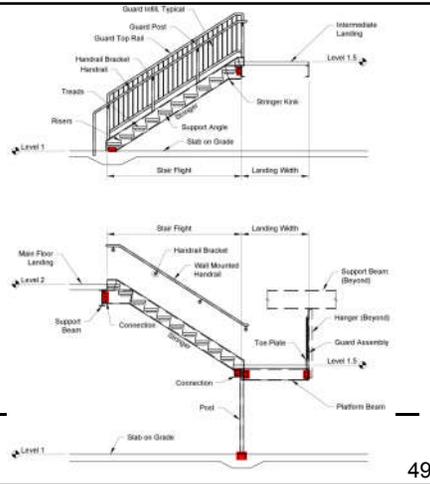

49

Stairway Layout – IBC or OSHA?

- Per International Code Council
 - All stairs should follow IBC unless AHJ approves
 - All stairs are egress stairs (even if area served is “unoccupied” or seldom used)
 - Certain exceptions for equipment per International Mechanical Code



50


Stairway Layout – IBC or OSHA?

IBC stair is OSHA compliant but...
 OSHA stair may not be IBC compliant








51

Stairway Layout - IBC

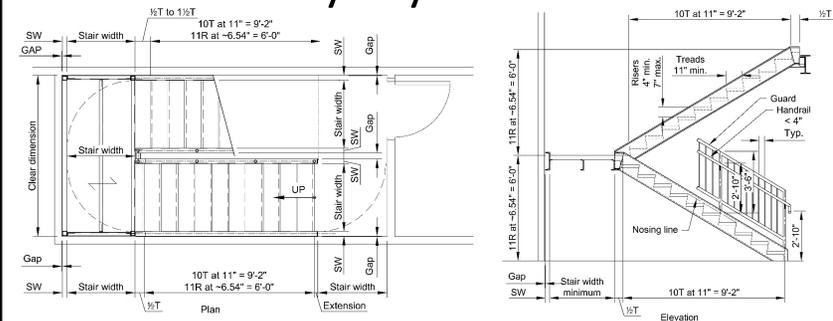

52

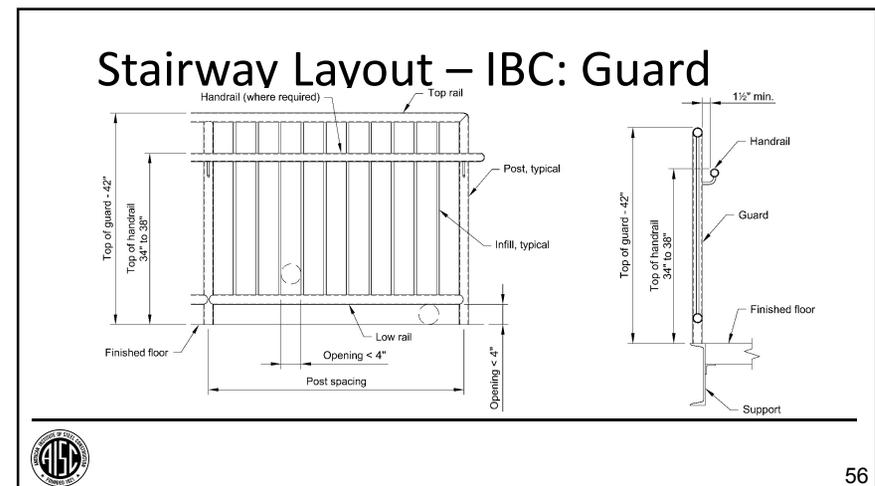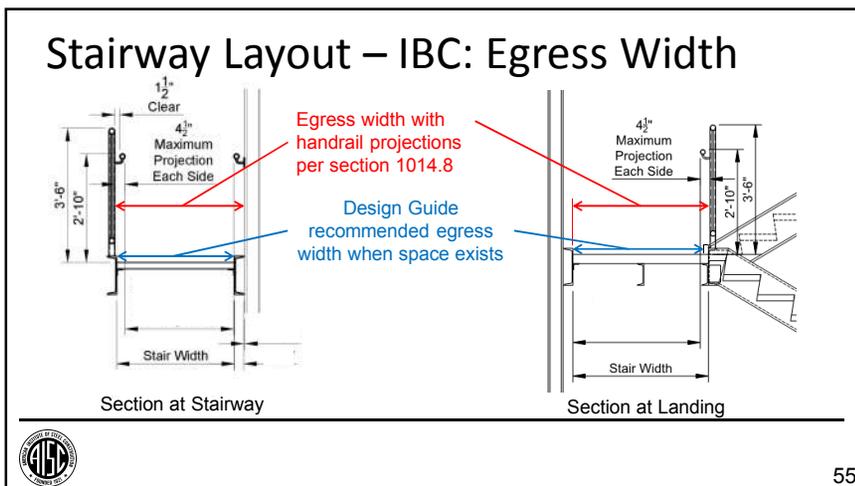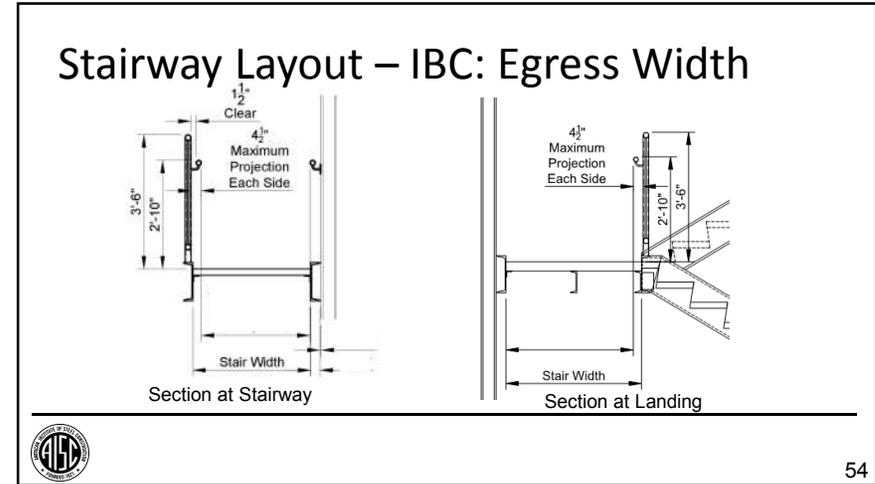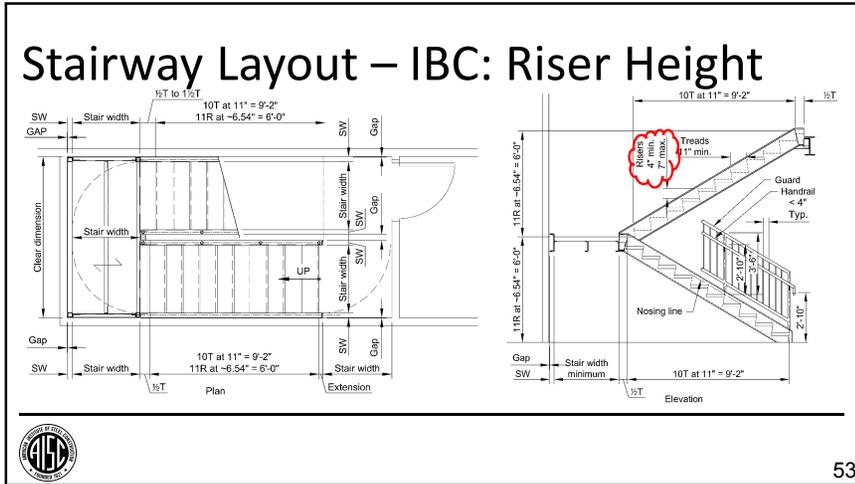


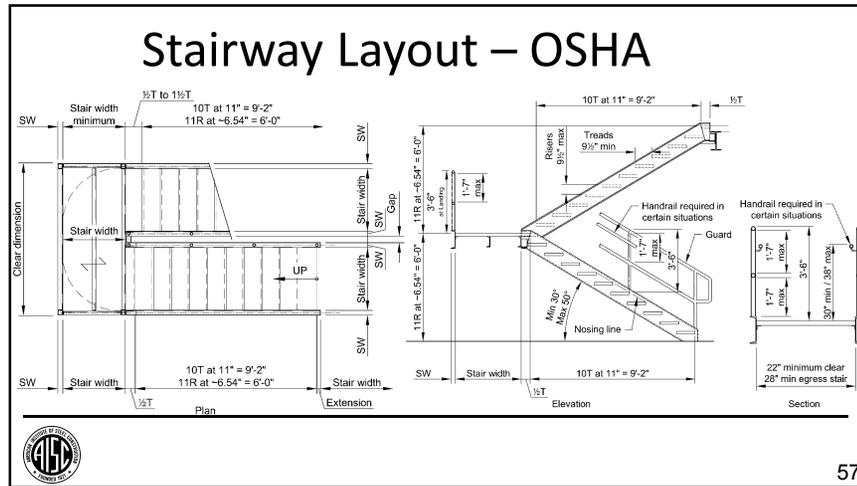

Stairway Layout – OSHA: Updates

- OSHA revised standard 1910 Subpart D as of 1/17/2017
- Renumbered and reorganized:
 - 1910.25 – Stairways
 - 1910.28 – Duty to have fall protection & falling object protection
 - 1910.29 – Fall protection systems and falling object protection-criteria and practices
- Changed riser/tread limits
- Changed vertical clearance
- **Revised guard height and handrail requirements**

58

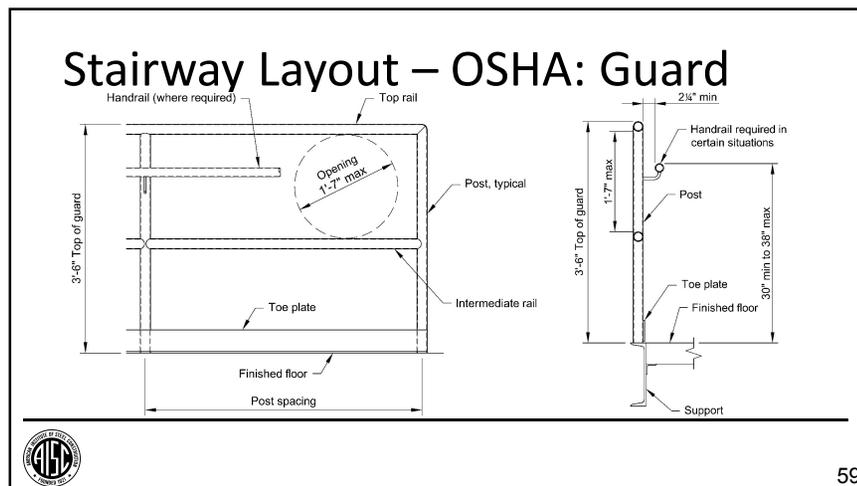

Stairway Layout – OSHA: Width

- 1910.25(c)(4)
 - Minimum width = 22" between vertical barriers
- 1910.25 Figure D-8
 - Minimum tread width = 22"
- 1910.36(g)(2)
 - Minimum width = 28" at all points for exit routes

MINIMUM TREAD WIDTH 22 IN (56 CM)
 MINIMUM TREAD DEPTH 9.5 IN (24 CM)
 MAXIMUM RISER HEIGHT 9.5 IN (24 CM)
 OSHA Figure D-8

60

Stairway Layout – OSHA: Width

- 1910.28(b)(11)(ii) & Table

Each flight of stairs having at least 3 treads and at least 4 risers is equipped with stair rail systems and handrails as follows:

Table D-2 – Stairway Handrail Requirements

Stair width	Enclosed	One open side	Two open sides	With earth built up on both sides
Less than 44 inches (1.1 m).	At least one handrail	One stair rail system with handrail on open side.	One stair rail system each open side.	
44 inches (1.1 m) to 68 inches (2.2 m).	One handrail on each enclosed side	One Stair rail system with handrail on open side and one handrail on enclosed side.	One stair rail system with handrail on each open side.	
Greater than 68 inches (2.2 m).	One handrail on each enclosed side and one intermediate handrail located in the middle of the stair	One stair rail system with handrail on open side, one handrail on enclosed side, and one intermediate handrail located in the middle of the stair.	One stair rail system with handrail on each open side and one intermediate handrail located in the middle of the stair.	
Exterior stairs less than 44 inches (1.1 m).				One handrail on least one side.

Note to table: The width of the stair must be clear of all obstructions except handrails.



61

Stairway Layout – OSHA: Width

- 1910.28(b)(11)(ii) & Table

Each flight of stairs having at least 3 treads and at least 4 risers is equipped with stair rail systems and handrails as follows:

Table D-2 – Stairway Handrail Requirements

Stair width	Enclosed	One open side	Two open sides	With earth built up on both sides
Less than 44 inches (1.1 m).	At least one handrail	One stair rail system with handrail on open side.	One stair rail system each open side.	
44 inches (1.1 m) to 68 inches (2.2 m).	One handrail on each enclosed side	One Stair rail system with handrail on open side and one handrail on enclosed side.	One stair rail system with handrail on each open side.	
Greater than 68 inches (2.2 m).	One handrail on each enclosed side and one intermediate handrail located in the middle of the stair	One stair rail system with handrail on open side, one handrail on enclosed side, and one intermediate handrail located in the middle of the stair.	One stair rail system with handrail on each open side and one intermediate handrail located in the middle of the stair.	
Exterior stairs less than 44 inches (1.1 m).				One handrail on least one side.


Note to table: The width of the stair must be clear of all obstructions except handrails.



62

Stairway Layout – OSHA: Width

Try to provide minimum distance (22" min or 28" min) when possible.

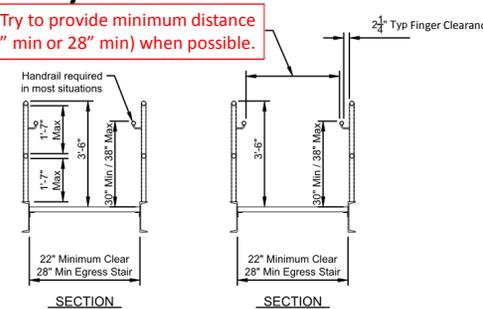


SECTION SECTION



63

Stairway Layout – OSHA: Width




Try to provide minimum distance (22" min or 28" min) when possible.

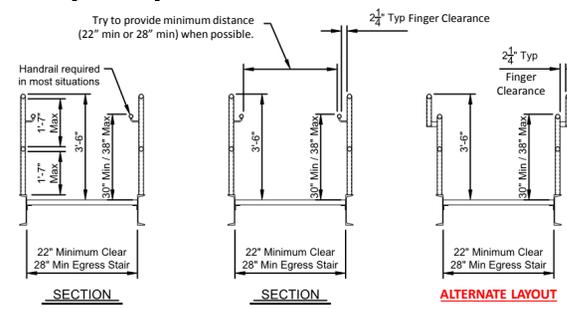

SECTION SECTION ALTERNATE LAYOUT



64

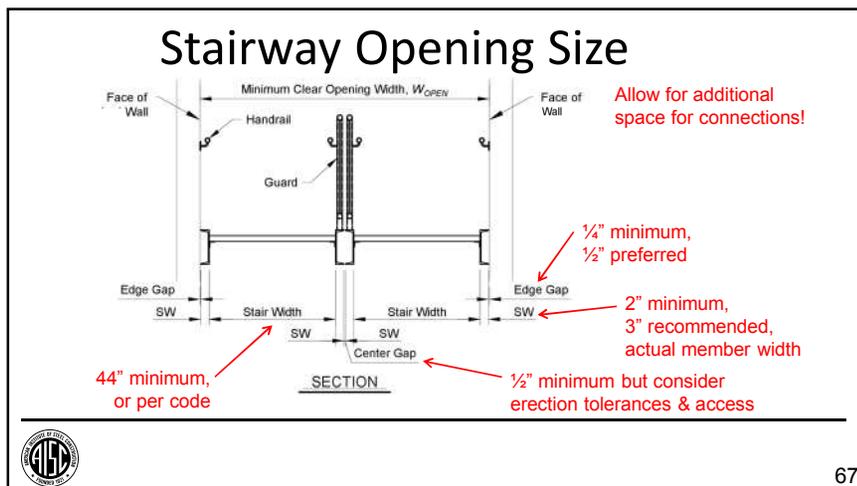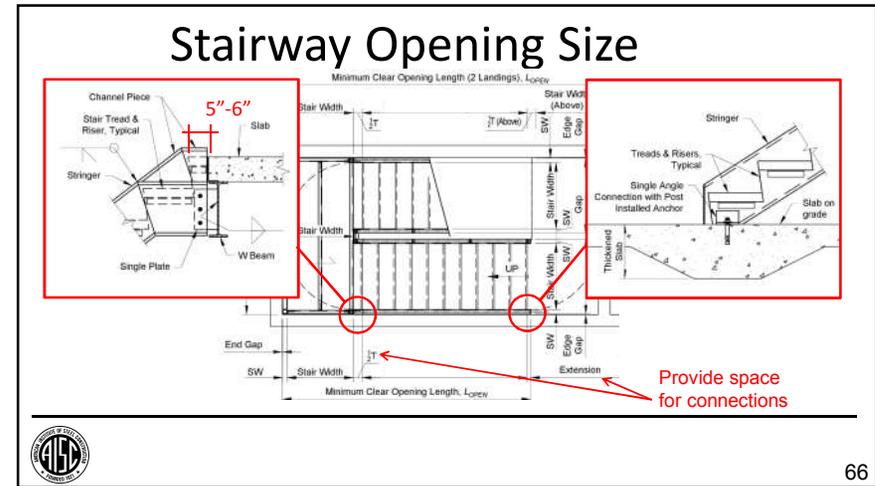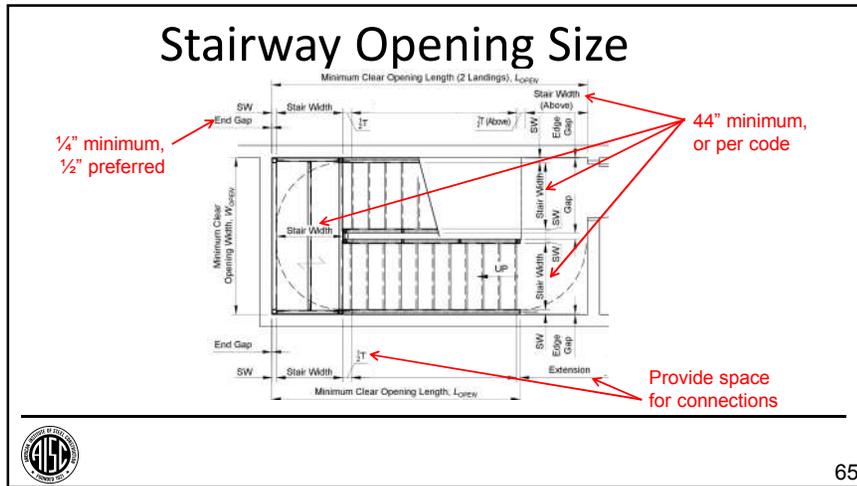

Stairway Opening Size

- Field installed slab edge angle
 - Allows for adjustment in field to help with fit-up

SECTION

6" Typical Overhang
 $\pm 1"$ Adjustment
 at Stair Openings*

* - Coordinate final opening dimensions with Architect & SER during detailing.

68

Outline – Part 1

Step 1 – Purpose & Design Philosophy

Step 2 – Stairway Overview

Step 3 – Code Requirements - Gravity

Step 4 – Stairway Design

Step 5 – Members & Connx

Step 6 – Examples



69

Applicable Codes

- International Building Code (IBC)
 - Chapter 10 “Means of Egress”
 - Chapter 16 “Structural Design” – Loads, Combos, & Serviceability
- ASCE/SEI 7-16 Minimum Design Loads for Buildings & Other Structures
 - Loading & Load Combinations
- Occupational Safety & Health Administration (OSHA)
 - 1910 Subpart D
 - 1910.25 Stairways
 - 1910.28 Duty to have fall protection and falling object protection
 - 1910.29 Fall protection systems and falling object protection
 - 1910.36 Design and construction requirements for exit routes



70

Load Combinations

- Refer to ASCE7-16 Chapter 2 for LRFD & ASD Load Combinations

LRFD	ASD
1. 1.4D	1. D
2. 1.2D+1.6L+0.5(L _r or S or R)	2. D+L
3. 1.2D+1.6(L _r or S or R)+1.0(L or 0.5W)	3. D+(L _r or S or R)
4. 1.2D+1.0W+1.0L+0.5(L _r or S or R)	4. D+0.75L+0.75(L _r or S or R)
5. 0.9D+1.0W	5. D+0.6W
6. 1.2D+1.0E _v +1.0E _h +1.0L+0.2S	6. D+0.75L+0.75(0.6W)+0.75(L _r or S or R)
7. 0.9D-1.0E _v +1.0E _h	7. 0.6D+0.6W
	8. D+0.7E _v +0.7E _h
	9. D+0.525E _v +0.525E _h +0.75L+0.75S
	10. 0.6D-0.7E _v +0.7E _h



71

Loading

- Dead Loads
 - Self weight (steel members, concrete fill, etc.)
 - MEP Allowances
 - Architectural finishes (flooring, walls, soffits, etc.)
 - Typical material weights found in
 - ASCE 7-16 commentary Chapter C3 “Dead Loads”
 - AISC Tables 17-12 & 17-13



72



Loading – IBC 2015 / ASCE 7-16

- Live Loads

Component	Loading
Stair Tread	300 lb concentrated load on 4 in ² or 100 psf uniform load
Stair Landing	100 psf uniform load
Guard – Top Rail	200 lb force in any direction or 50 lb/foot in any direction
Guard – Infill & Other Rails	50 lb over 1 square foot
Handrail	200 lb force in any direction or 50 lb/foot in any direction



73

Loading – OSHA

Component	Loading
Stair Tread / Landing	Five times “normal live load” or 1,000 lb concentrated load
Guard/Stair Rail System – Top Rail	200 lb force in downward or outward direction
Guard/Stair Rail System – Infill	150 lb force in downward or outward direction
Handrail	200 lb force in downward or outward direction
Toeboard / Toeplate	50 lb force in downward or outward direction



74

Loading – OSHA

- What is “normal live load”?
 - Based on actual usage of the stair
 - Divide total weight of users over stair plan area
 - 300 lbs / 20 ft² = 15 psf
 - Multiply above value by five
 - 15 psf × 5 = 75 psf → “normal live load”
- Recommend using 60 psf minimum design value based on ASCE 7 Table 4-1 for “walkways and elevated platforms”
- 1,000 lb concentrated force may govern



75

Serviceability – IBC 2015, Table 1604.3

Deflection

Component	L	D+L
Floor members (stringers/landings)	Span/360	Span/240
Supporting tile/brittle floor finish	<i>Span/600</i>	Span/240
Cantilever Guard Post*	Height/60	
Guard, Handrail, Infill**	Span/120	

* - Matches deflection limit for interior partitions with flexible finishes and twice the height for cantilever members

** - Matches deflection limit for interior partitions with flexible finishes



76

Outline – Part 1

Step 1 – Purpose & Design Philosophy

Step 2 – Stairway Overview

Step 3 – Code Requirements - Gravity

Step 4 – Stairway Design

Step 5 – Members & Connx


Step 6 – Examples



77

Stairway Design


- Sloping Beam versus Horizontal Plane Method

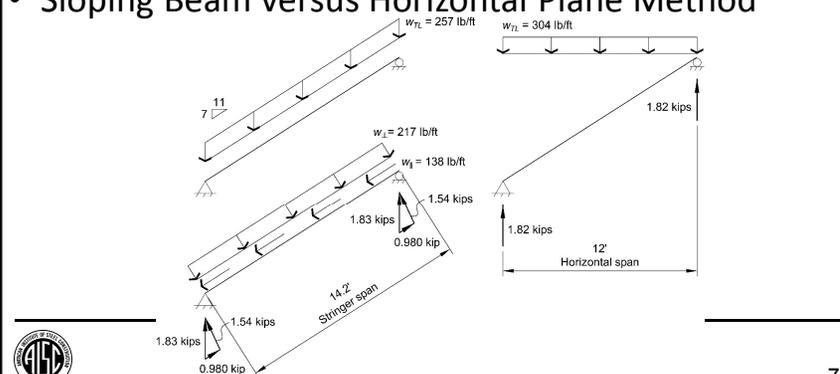


78

Stairway Design

- Simple Span versus Frame Analysis

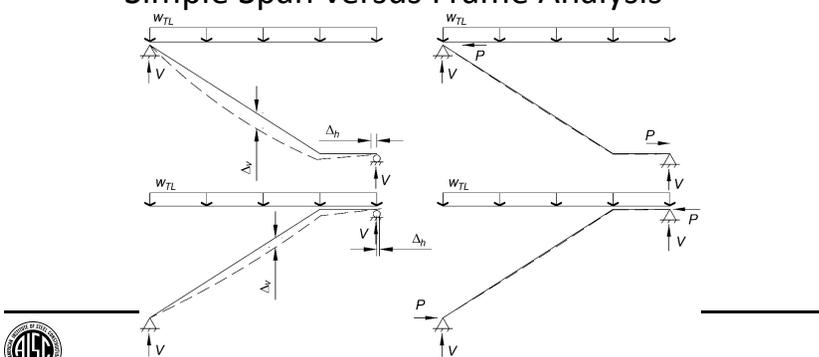


79

Stairway Design

- Simple Span

• Roller support allows for some lateral movement. This is a relatively small value for Δ_h on most stairs.

• Designers can accommodate with connections, flexible supports, drift detail.

$$R = V = \frac{wl}{2}$$


$$M_{max} = \frac{wl^2}{8}$$

$$\Delta_{max} = \frac{5wl^4}{384EI}$$


80

Stairway Design

• Frame Analysis

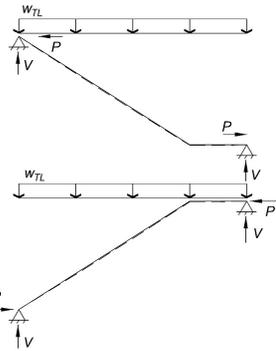

- Pin supports at each end restrain lateral deflection. Results in very small vertical deflection and large axial reactions due to catenary action or arching action.
- Designers must design connections for large axial reactions.



Frame analysis

81

Stairway Design – Unbraced Length

- Refer to AISC *Specification* Appendix Section 6.3
 - Determine if tread/riser has adequate stiffness and strength to brace stringer
- Likely fully braced using:
 - Welded tread/riser “Z shape” pans (concrete filled)
 - Welded checker plate
- Needs more research:
 - Bolted grating treads
 - Flat pans (tread only, no riser)
 - Precast, fiberglass, or other manufactured products



82

Stairway Design – Serviceability

- Deflection Limits
 - IBC Limits
 - 1/4” maximum?
 - Floor/wall finishes
- Vibration Concerns



83

Outline – Part 1

Step 1 – Purpose & Design Philosophy

Step 2 – Stairway Overview

Step 3 – Code Requirements - Gravity

Step 4 – Stairway Design

Step 5 – Members & Connx


Step 6 – Examples



84

Member Selection


- Stringers – Channel, Plate, Rectangular HSS, WF

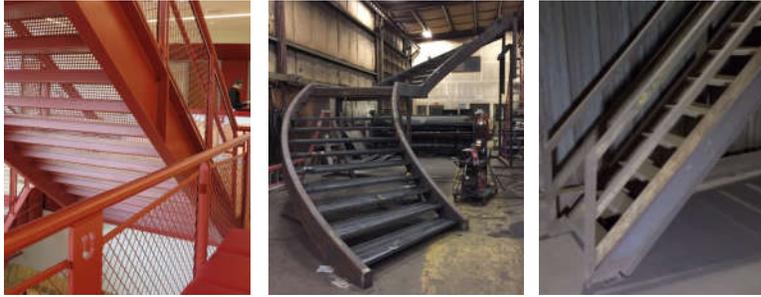

85

Member Selection

- Guards/Rails – Pipe, HSS, Bar, Rounds, Custom

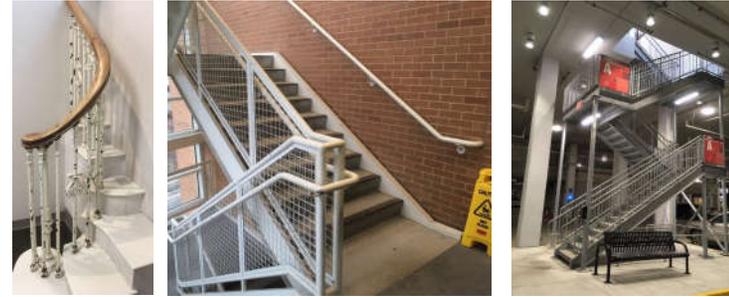

86

Member Selection


- Guards/Rails – Pipe, HSS, Bar, Rounds, Custom



87

Treads/Risers

- Integral Pan Tread & Riser with Concrete Fill
 - Directly welded
 - Carrier bar or angle for support
 - Refer to AISI code for design of light gauge material
 - Use effective section properties
 - Consider which portion of profile provides strength and stiffness (partially effective)

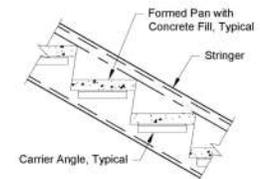

88

Treads/Risers


- Steel Plate
 - Checkered Plate or Diamond Plate
 - AISC Manual Table 3-18a provides recommended maximum uniform load based on span for a deflection limit of $L/100$
 - AISC Manual Table 3-18b provides recommended maximum uniform load based on span and stress limit of 24 ksi in LRFD and 16 ksi in ASD.
 - Based on ASTM A786 Standard Specification for Steel Floor Plates typically used for checkered/diamond plate applications.
 - Verify section properties and material properties with supplier.
 - Flat plate or stiffened plate



89

Treads/Risers

- Steel Grating
 - Good for wet environments, outdoors, industrial
 - Typically a purchased “buy out” item
 - Confirm with manufacturer for strength & serviceability
 - Verify if ADA requirements must be met (opening sizes in grating)
- Non-steel Options
 - Precast concrete, glass, plastic, wood, fiberglass.
 - Consider if special deflection criteria should be used



90

Stringer

Stringer Type	Advantages	Disadvantages
Channel (C or MC)	<ul style="list-style-type: none"> • Variety of sizes, weights, and depths that are widely available • Flange can be used to support guard posts • End connections can use typical bolted simple shear connections 	<ul style="list-style-type: none"> • Wider than plate and some HSS members
Plate	<ul style="list-style-type: none"> • Readily available • Narrower than other alternatives • End connections can use typical bolted simple shear connections 	<ul style="list-style-type: none"> • Lower flexural strength than other options compared to member weight • Lower member strength for lateral loading
Rectangular HSS	<ul style="list-style-type: none"> • Variety of sizes, weights, and depths that are widely available • Flange can be used to support guardrail posts 	<ul style="list-style-type: none"> • Additional fabrication required at joints and connections • More difficult end connections than other options • Typically heavier weight per foot than other options



91

Landings

- Cast-in-place concrete over metal deck
- Cast-in-place concrete over metal plate or stiffened metal plate
- Checkered plate flooring
- Steel grating
- Precast concrete



92

Landings

- Support Conditions
 - Building Supports
 - Post Supported Landing
 - Hanger Supported Landing
 - Integrated Landing
 - Separate Stair Flights




A photograph showing a close-up of a steel landing structure. A vertical steel column supports a horizontal steel beam, which in turn supports the landing deck. The structure is made of heavy-duty steel members.



93

Landings

- Support Conditions
 - Building Supports
 - **Post Supported Landing**
 - Hanger Supported Landing
 - Integrated Landing
 - Separate Stair Flights

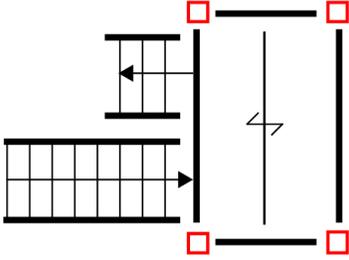

A schematic diagram of a landing system. It shows two stair flights meeting at a central landing. The landing is supported by a vertical post. Red squares are placed at the top and bottom of the post to indicate the support conditions. Arrows point from the stair flights towards the landing.



94

Landings

- Support Conditions
 - Building Supports
 - **Post Supported Landing**
 - Hanger Supported Landing
 - Integrated Landing
 - Separate Stair Flights




A photograph of an outdoor steel staircase. The landing is supported by a hanger system, where the landing deck is suspended from a horizontal beam above it. A bench is visible in the foreground.



95

Landings

- Support Conditions
 - Building Supports
 - Post Supported Landing
 - **Hanger Supported Landing**
 - Integrated Landing
 - Separate Stair Flights

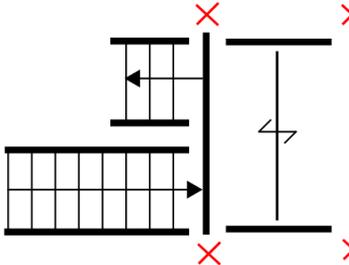

A schematic diagram of a landing system, similar to slide 94, but with red 'X' marks at the top and bottom of the vertical post to indicate hanger support conditions. Arrows point from the stair flights towards the landing.



96

Landings


- Support Conditions
 - Building Supports
 - Post Supported Landing
 - **Hanger Supported Landing**
 - Integrated Landing
 - Separate Stair Flights



97

Landings

- Support Conditions
 - Building Supports
 - Post Supported Landing
 - Hanger Supported Landing
 - **Integrated Landing**
 - Separate Stair Flights

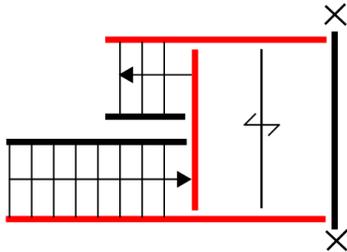

98

Landings


- Support Conditions
 - Building Supports
 - Post Supported Landing
 - Hanger Supported Landing
 - **Integrated Landing**
 - Separate Stair Flights



99

Landings

- Support Conditions
 - Building Supports
 - Post Supported Landing
 - Hanger Supported Landing
 - Integrated Landing
 - **Separate Stair Flights**

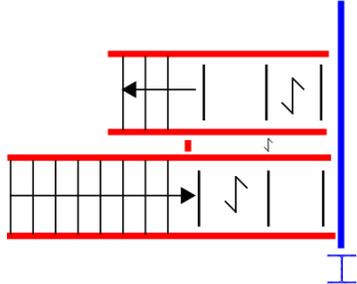

100

Landings


- Support Conditions
 - Building Supports
 - Post Supported Landing
 - Hanger Supported Landing
 - Integrated Landing
 - **Separate Stair Flights**



101

Guard & Handrail


- Member Types
 - Pipe
 - HSS Round
 - Rectangular HSS
 - Angle
 - Plate, Bar, & Rod

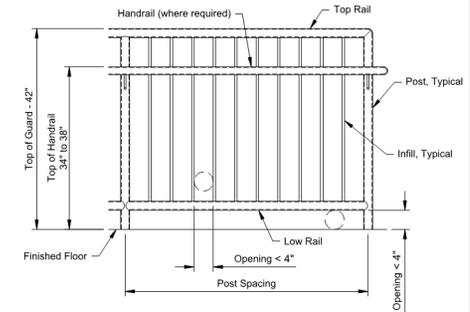


102

Guard & Handrail

- Member Types
 - **Pipe**
 - HSS Round
 - Rectangular HSS
 - Angle
 - Plate, Bar, & Rod



ASTM A53 GR B
 PIPE 1 1/4"




ASTM A53 GR B
 PIPE 1 1/2"



103

Connections


- General
 - AISC *Manual* Part 7 Bolts
 - AISC *Manual* Part 8 Welds
 - AISC *Manual* Part 9 Connecting Elements
 - AISC *Specification*
 - AISC *Design Examples* (available at aisc.org)
 - DG24 – Hollow Structural Section Connections
- Shear
 - AISC *Manual* Part 10

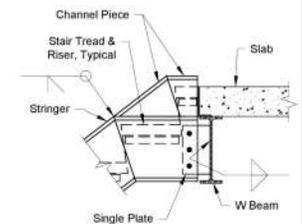

104

Connections


- Shear & Axial
 - Follow AISC *Specification & Design Examples* (available at aisc.org)
- Moment
 - AISC *Manual* Part 11
 - AISC *Manual* Part 12
 - DG4 – Extended End-Plate Moment Connections
 - DG16 – Flush & Extended Multiple-Row Moment End-Plate Connx

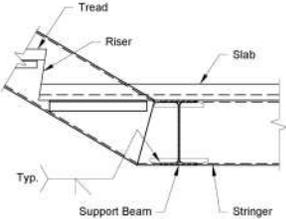


105

Connections


- Bracing
 - AISC *Manual* Part 13
 - DG29 – Vertical Bracing Connections-Analysis and Design
- Embedded Plates
- Post Installed Anchors
- Beam Pockets

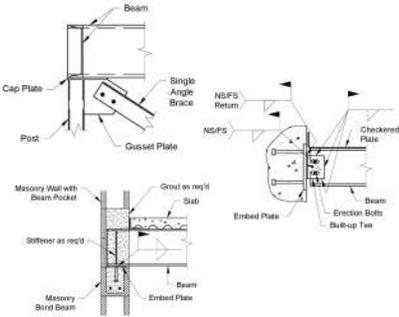


106

Guard Post Connx

- Imparts torsion, shear, axial loads on stringer

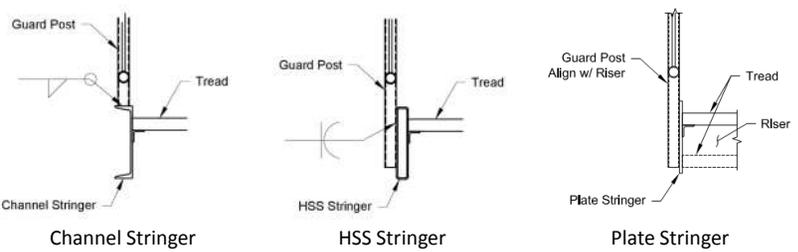


107

Guard Post Connx

- Consider fit-up of post to stringer




108

Guard Post Connx

- Channel Stringer
 - Determine strength of channel flange

$$B_{eff} = N + 2(2.5) \left[\left(k - \frac{t_f}{2} \right) + b_f \right]$$

where
 k = beam fillet dimension
 t_f = flange thickness
 b_f = flange width
 N = guard post diameter

$$Z = \frac{B_{eff} t_w^2}{4} \quad S = \frac{B_{eff} t_w^2}{6}$$


109

Guard Post Connx

- Imparts torsion, shear, axial loads on stringer


110

Outline – Part 1

Step 1 – Purpose & Design Philosophy

Step 2 – Stairway Overview

Step 3 – Code Requirements - Gravity

Step 4 – Stairway Design

Step 5 – Members & Connx



Step 6 – Examples


111

Example 1: Opening Size

- Project requires:
 - Egress Stair for Office Building
 - Masonry Core Walls
 - Channel Stringers
 - Provide 6" clear gap between stringers


112

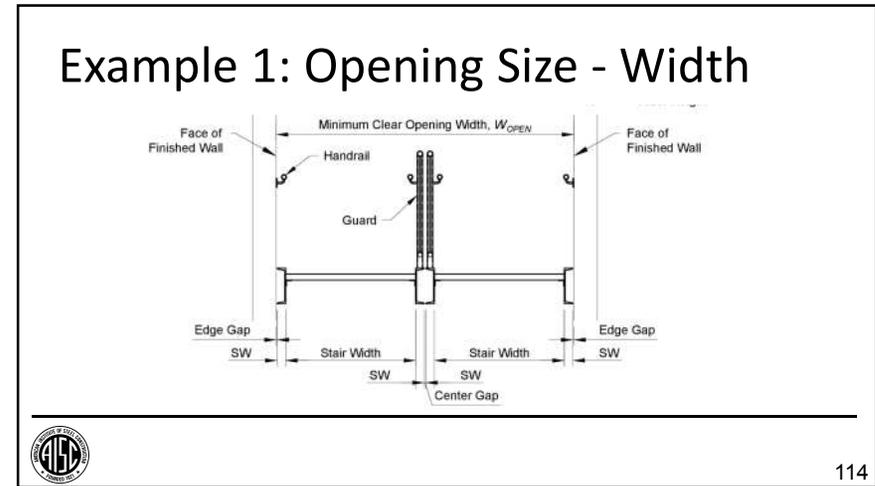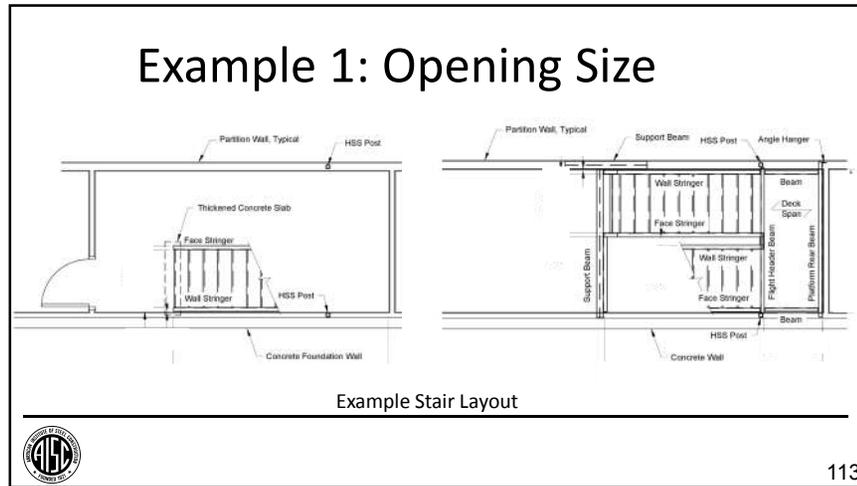

Example 1: Opening Size - Width

$$W_{open} = 2(\text{Edge Gap}) + 4(\text{Stringer Width}) + 2(\text{Egress Width}) + 1(\text{Center Gap})$$

- Edge Gap = 1/2"
- Stringer Width = 3" (C12x20.7)
- Egress Width = 44"
- Center Gap = 6"

115

Example 1: Opening Size - Width

$$W_{open} = 2(1/2") + 4(3") + 2(44") + 1(6")$$

$$W_{open} = 107" = \mathbf{8'-11"} \text{ clear dimension}$$

116

Example 1: Opening Size - Length

$$L_{\text{landing}} = N_{\text{landing}}[(\text{Stringer Width}) + (\text{Egress Width}) + (\text{End Gap})]$$

N = 1 landing

Stringer Width = 3"

Egress Width = 44"

End Gap = 1/2"



121

Example 1: Opening Size - Length

$$L_{\text{open}} = L_{\text{stair}} + L_{\text{landing}}$$

$$L_{\text{stair}} = 10(11'') + (6'') = 116''$$

$$L_{\text{landing}} = 1[(3'') + (44'') + (1/2'')] = 47.5''$$


$$L_{\text{open}} = L_{\text{stair}} + L_{\text{landing}} = 116'' + 47.5'' = 163.5'' = \mathbf{13'-7 \frac{1}{2}''}$$



122

Example 1: Opening Size


Provide 8'-11" x 13'-7 1/2" Opening

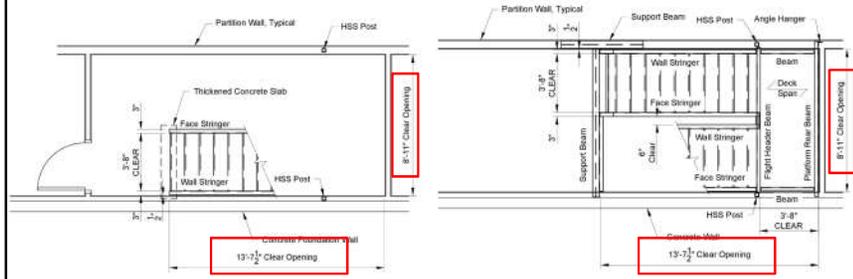

123

Example 1: Opening Size


Provide 8'-11" x 13'-7 1/2" Opening

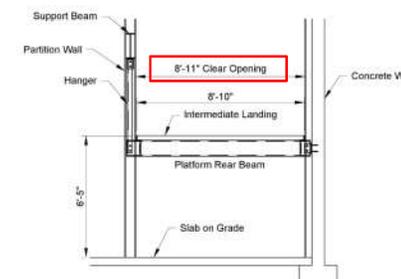

124

Example 2: Stringer Design

- Design low stringer
- 44" Wide Stair
- Span = 9'-8"
- Try C12x20.7
 - Fully braced by tread/riser
- LC = D+L or 1.2D+1.6L

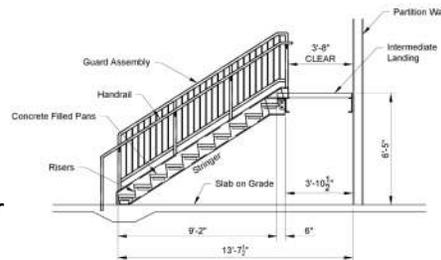

125

Example 2: Stringer Design

• Imposed Loading

Dead Load:

Stringer Self weight		
Guard Self weight		
12 ga treads/risers with 2" concrete fill =	30	psf
Superimposed MEP loads =	5	psf
Total	= 35	psf

Live Load:

Live load =	100	psf
Total	= 100	psf



126

Example 2: Stringer Design

• Stringer Loads

Dead Load:

Stringer Self weight (20.7 lb/ft X 1.185 slope factor)	=	24.5	lb/ft
Guard Self weight (20 lb/ft)	=	20	lb/ft
12 ga treads/risers with 2" concrete fill = 30 psf X 1.84'	=	55.2	lb/ft
Superimposed MEP loads = 5 psf X 1.84'	=	9.2	lb/ft
Total	=	109	lb/ft


Live Load:

Live load = 100 psf X 1.84'	=	184	lb/ft
Total	=	184	lb/ft



127

Example 2: Stringer Design

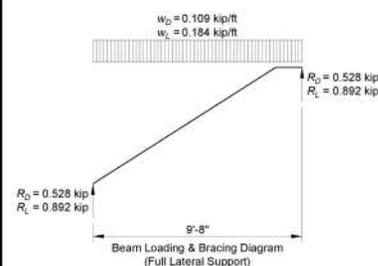

$$R = V = \frac{wl}{2}$$

$$M_{max} = \frac{wl^2}{8}$$

	ASD	LRFD
w	0.293 k/ft	0.425 k/ft
R	1.42 k	2.05 k
M	3.43 k-ft	4.97 k-ft



128

Example 2: Stringer Design

	ASD	LRFD
w	0.293 k/ft	0.425 k/ft
R	1.42 k	2.05 k
M	3.43 k-ft	4.97 k-ft


Refer to Manual Table 3-8
 For C12x20.7, $L_b < L_p$
 ASD
 $V_n/\Omega_v = 43.8 \text{ k} > 1.42 \text{ k}$ OK
 $M_p/\Omega_b = 46.0 \text{ k-ft} > 3.43 \text{ k-ft}$ OK
 LRFD
 $\Phi_v V_n = 65.8 \text{ k} > 2.05 \text{ k}$ OK
 $\Phi_b M_p = 69.1 \text{ k-ft} > 4.97 \text{ k-ft}$ OK

C12x20.7 is adequate for imposed loads



129

Example 2: Stringer Design

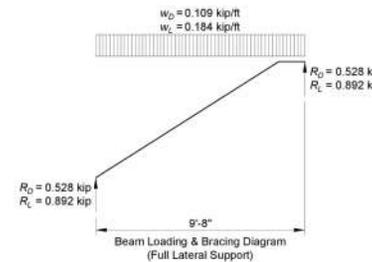

Check Deflection:

$$\Delta = \frac{5 w \text{ kip/in.} (L \text{ in.})^4}{384 (29,000 \text{ ksi}) (I \text{ in.}^4)} = \frac{w \text{ kip/ft} (L \text{ ft})^4}{1,290 (I \text{ in.}^4)}$$

Live Load:

$$\Delta_{LL \text{ allowable}} = \frac{(9.67 \text{ ft}) \left(\frac{12 \text{ in.}}{1 \text{ ft}} \right)}{360} = 0.322 \text{ in.}$$

$$\Delta_{LL} = \frac{0.184 \text{ kip/ft} (9.67 \text{ ft})^4}{1,290 (129 \text{ in.}^4)} = 0.010 \text{ in.} < 0.322 \text{ in.} \quad \text{OK}$$

Total Load:


$$\Delta_{TL \text{ allowable}} = \frac{(9.67 \text{ ft}) \left(\frac{12 \text{ in.}}{1 \text{ ft}} \right)}{240} = 0.484 \text{ in.}$$

$$\Delta_{TL} = \frac{0.293 \text{ kip/ft} (9.67 \text{ ft})^4}{1,290 (129 \text{ in.}^4)} = 0.015 \text{ in.} < 0.484 \text{ in.} \quad \text{OK}$$




130

Example 3: Guard Post Conn

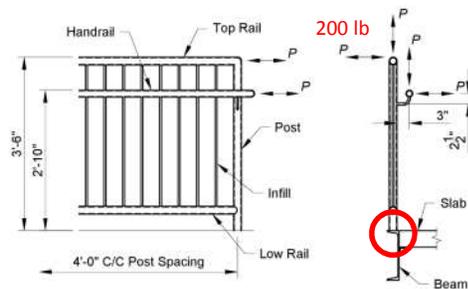


131

Example 3: Guard Post Conn

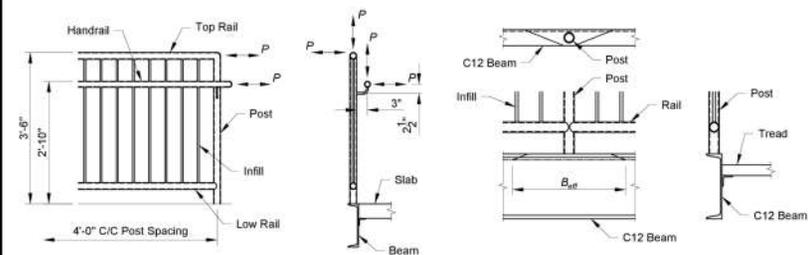

132

Example 3: Guard Post Conn

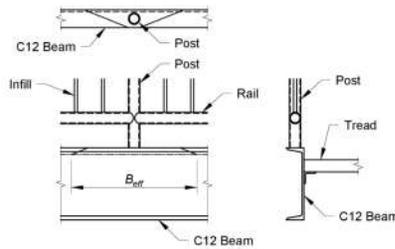


Guard Post
 ASTM A500 Gr. C Round
 $F_y = 46$ ksi
 $F_u = 62$ ksi

Channel
 ASTM A36
 $F_y = 36$ ksi
 $F_u = 58$ ksi



133

Example 3: Guard Post Conn

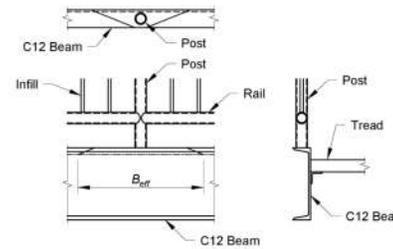


From AISC *Manual* Table 1-13, the geometric properties are as follows:
 ASTM A500 Gr. C HSS1.90x0.145
 Outside diameter = 1.90 in.

From AISC *Manual* Table 1-5, the geometric properties are as follows:
 ASTM A36 C12x20.7
 $k = 1.125$ in.
 $t_f = 0.501$ in.
 $b_f = 2.94$ in.
 $t_w = 0.282$ in.



134

Example 3: Guard Post Conn

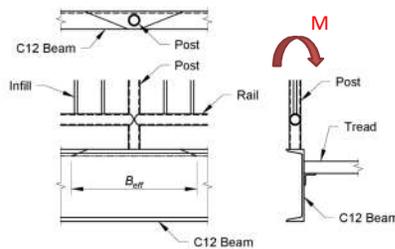

$$M_{max} = PL$$

	ASD	LRFD
P	0.200 k	0.320 k
L		42"
M	8.4 k-in	13.4 k-in



135

Example 3: Guard Post Conn

Determine effective width of channel top flange:


$$B_{eff} = N + 2 \left(2.5 \left[k - \frac{t_f}{2} \right] + b_f \right)$$

$$B_{eff} = 1.90 \text{ in.} + 2 \left(2.5 \left[1.125 \text{ in.} - \frac{0.501 \text{ in.}}{2} \right] + 2.94 \text{ in.} \right) = 20.97 \text{ in.}$$

Determine section modulus of effective web:

$$Z = \frac{B_{eff} t_w^2}{4} = \frac{20.97 \text{ in.} (0.282 \text{ in.})^2}{4} = 0.417 \text{ in.}^3$$

$$S = \frac{B_{eff} t_w^2}{6} = \frac{20.97 \text{ in.} (0.282 \text{ in.})^2}{6} = 0.278 \text{ in.}^3$$

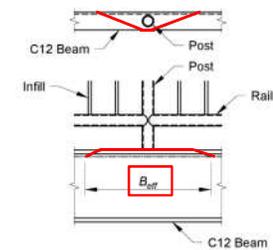

136

Example 3: Guard Post Conn

Determine nominal flexural strength of C12 web:

$$\begin{aligned}M_p &= F_y Z \leq 1.6 M_y \\ &= F_y Z \leq 1.6 F_y S \\ &= 36 \text{ ksi} (0.417 \text{ in.}^3) \leq 1.6 (36 \text{ ksi}) (0.278 \text{ in.}^3) \\ &= 15.0 \text{ kip-in.} \leq 16.0 \text{ kip-in.} \\ &= 15.0 \text{ kip-in.}\end{aligned}$$

ASD

$$M_p / \Omega_b = 15.0 \text{ k-in} / 1.67$$

$$M_p / \Omega_b = 8.98 \text{ k-in} > 8.4 \text{ k-in OK}$$

LRFD

$$\Phi_b M_p = 0.9 (15.0 \text{ k-in})$$

$$\Phi_b M_p = 13.5 \text{ k-in} > 13.4 \text{ k-in OK}$$



137

Questions?



138

PDH Certificates

Within 2 business days...

- You will receive an email on how to report attendance from: registration@aisc.org.
- Be on the lookout: Check your spam filter! Check your junk folder!
- Completely fill out online form. Don't forget to check the boxes next to each attendee's name!



PDH Certificates

Within 2 business days...

- Reporting site (URL will be provided in the forthcoming email).
- Username: Same as AISC website username.
- Password: Same as AISC website password.



There's always a solution in steel.

Thank You

Please give us your feedback!
Survey at conclusion of webinar.

A large, faint watermark of the AISC logo is visible in the bottom right corner of the slide. The logo consists of a circular emblem with the letters 'AISC' in the center, surrounded by the text 'AMERICAN INSTITUTE OF STEEL CONSTRUCTION' and 'FOUNDED 1921'. Below the emblem, the words 'structural STEEL' are written in a smaller font.