

# AISC LRFD Rules for Block Shear in Bolted Connections—A Review

GEOFFREY L. KULAK and GILBERT Y. GRONDIN

## INTRODUCTION

The AISC LRFD specification (LRFD, 1999) for the design of steel structures contains provisions for what is customarily termed *block shear*. Notionally, this refers to the displacement of a block of material. It is usually associated with bolted details because a reduced area is present in that case, but in principle it can also be present in welded details. This paper deals only with bolted connections, however.

An example of what is used frequently to illustrate block shear is the gusset plate connection shown in Figure 1(a). It will be put forward later in this paper that the type of failure implied in this sketch does not in fact correspond to conditions at the time the ultimate load is reached. Another important case involving block shear is that of the web in a coped beam, as shown in Figure 1(b). The type of failure conventionally associated with this case will also be discussed.

The AISC LRFD rules use the relationship that shear yield and shear ultimate stress can be represented using the von Mises criterion, i.e.,  $\tau_y \approx 0.6\sigma_y$  and  $\tau_u \approx 0.6\sigma_u$ . The design rules are as follows:

$$\text{if } \sigma_u A_{nt} \geq (0.6 \sigma_u) A_{nv} \quad (1)$$

$$\text{then } R_n = \sigma_u A_{nt} + (0.6 \sigma_y) A_{gv}$$

$$\text{and if } (0.6 \sigma_u) A_{nt} > \sigma_u A_{nt}$$

$$\text{then } R_n = (0.6 \sigma_u) A_{nt} + \sigma_y A_{gt} \quad (2)$$

where

$\sigma_y$  = tensile yield strength

$\sigma_u$  = tensile ultimate strength

$\tau_y$  = shear yield strength

$\tau_u$  = ultimate shear strength

$A_{nt}$  = net area subjected to tension

$A_{nv}$  = net area subjected to shear

$A_{gt}$  = gross area subjected to tension

$A_{gv}$  = gross area subjected to shear

$R_n$  = nominal block shear resistance

The AISC LRFD rules are written in Section J4.3 of the Specification (where the nomenclature  $F_u \equiv \sigma_u$  and  $F_y \equiv \sigma_y$  is used). Of course the nominal strength given by Equations 1 or 2 must be multiplied by a resistance factor to obtain the design strength. The value used in the LRFD *Specification* for block shear is 0.75. The AISC LRFD rules also stipulate an upper limit, namely, the sum of tension rupture on the net tension area and shear rupture on the net shear area.

Equation 1 says that if the ultimate tensile resistance is greater than the ultimate shear resistance, then the block shear resistance of the connection is the sum of the tensile resistance (on the net section) and the shear yield resistance (on the gross shear area). Conversely, if the ultimate shear resistance is greater than the ultimate tensile resistance (Equation 2), then the block shear resistance of the connection is the sum of the ultimate shear resistance (net shear area) and the tension yield force (gross cross-section).

In themselves, the strength statements presented by Equations 1 and 2 are plausible. It is reasonable to think that the capacity in block shear could be the fracture tensile strength in combination with the shear yield strength (Equation 1). However, the possibility of attaining the shear ultimate strength in combination with the tensile yield strength seems unlikely. This requires that the ductility of the material in tension be sufficient to allow shear fracture to be reached. Examination of the test results in the case of the gusset plates presented herein shows that this is in fact the situation—there is not sufficient tensile ductility to permit shear fracture to occur.

The *Commentary* to the *Specification* says that the larger of Equations 1 and 2 is to be taken as the governing value and it provides a rationale for this rule. However, the comment seems to belong to the block shear rules of an earlier edition of the specification (LRFD, 1986). At that time, the same equations as given here as Equations 1 and 2 were presented (in the *Commentary*), and the user was advised to use the larger of the two results. In the 1999 (and also in 1993) LRFD rules, the qualifying statements that now precede Equations 1 and 2 means that the “larger” choice is no longer appropriate.

A review of the test results indicates that the failure modes seen in two important categories, gusset plate con-

---

Geoffrey L. Kulak is emeritus professor, department of civil and environmental engineering, University of Alberta, Edmonton, Canada.

Gilbert Y. Grondin is associate professor, department of civil and environmental engineering, University of Alberta, Edmonton, Canada.

---

nections and the web of coped beams, are significantly different. The use of Equations 1 and 2 does not provide good predictions of the test results in either of these cases. Furthermore, examination of the test data upon which the rule is founded reveals that rupture or tearing of a *block* of material is not present at the time the ultimate load of a connection critical with respect to block shear is reached.

### GUSSET PLATE TESTS

There are a large number of gusset plate tests reported in the literature for which block shear is the failure mode. Table 1 shows the results of 109 of these, taken from five different sources—Hardash and Bjorhovde (1985), Rabinovitch and Cheng (1993), Udagawa and Yamada (1998), Nast, Grondin, and Cheng (1999), and Swanson and Leon (2000). In addition, in their paper Hardash and Bjorhovde reported on a total of 14 more tests, from three other sources, which are not included here: the data pool is sufficiently large without these additional tests.

All the gusset plate tests show that the ultimate load is reached when the tensile ductility of the gusset plate material at the first (i.e., inner) transverse line of bolts is exhausted. (This mode of failure was also observed in the 14 additional tests cited in the Hardash and Bjorhovde study.) This was true even in cases where oversize holes were used and in cases where the connection was short (i.e., not much shear area available). The tests show that fracture at the net tension section is reached before shear fracture can take place on the other surfaces, i.e., tensile fracture (net section) plus some shear yielding takes place. The displacement of a block of material is seen only when the test is continued until the parts separate, and this occurs after the ultimate strength of the connection has been reached.

Use of Equations 1 and 2 gives conservative predictions of gusset plate nominal strength (resistance factor taken as unity) by 20 percent for the 109 tests listed in Table 1.

### COPED BEAM TESTS

In contrast to the number of gusset plate tests available, there are not many tests of coped beams. Table 1 shows that there is a total of 21 tests. Seven of these involved connections with two lines of bolts and the other 14 had a single line of bolts. Two tests were for beams that had slotted holes.

The ratio of test ultimate load to the LRFD predicted nominal strength (i.e.,  $\phi = 1.0$ ) is non-conservative for three of the four series. In the test series that used two lines of bolts (Ricles and Yura, 1983), the ratio was significantly non-conservative (0.70). Although the test to LRFD predicted ratio in the Yura et al. series was only marginally less than unity, the standard deviation in this case is large. The test results presented by Aalberg and Larsen are the only results on coped beams that are predicted conservatively using AISC LRFD rules. It is clear that use of the AISC LRFD rules for block shear is not satisfactory for the important case of coped beams.

### ANGLE TESTS

Figure 1 (c) shows a single angle connected to a gusset plate. Experience and test results show that block shear is potentially a failure mode for angles, particularly when the connection is short.

Epstein (1992) reported the results of a large number of tension tests for pairs of angles connected by bolts to a gusset plate passing between the angles. A total of 114 tests were conducted on 38 different configurations. The number of variables was large—size of outstanding leg as compared with connected leg, connection geometry (including bolt stagger and pitch, angle size, eccentricity of load, and so on)—and this led to different modes of failure. The failure modes included block shear, net section rupture, bolt shear, and various combinations of these. In only 15 individual

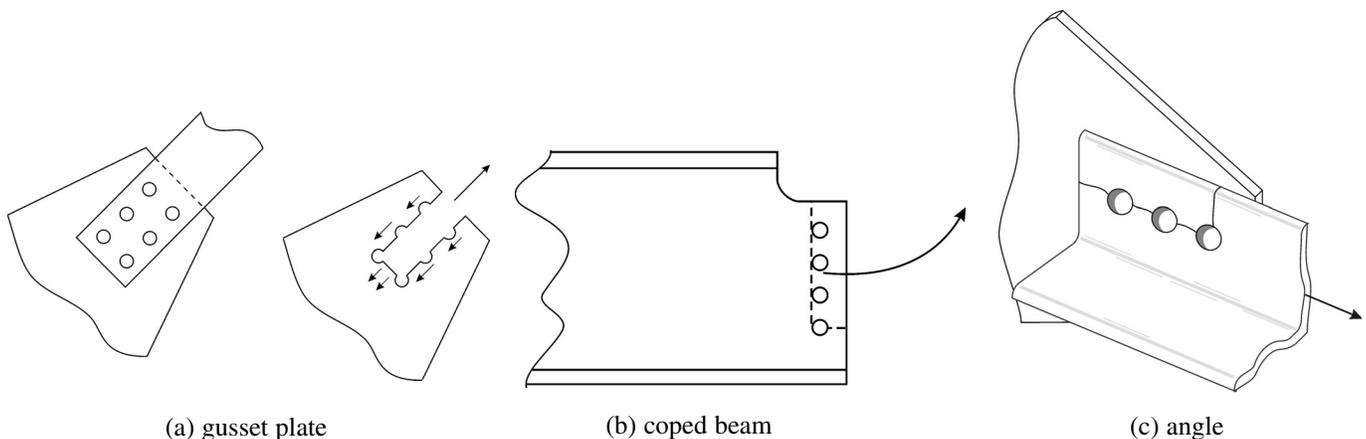


Fig. 1. Examples of block shear.

Table 1. Block Shear Examination for Selected Cases					
Source	Type	No. Tests	Test LRFD	Test Proposed	Comments
Hardash and Bjorhovde (1985)	Gusset Plates	28	1.22 (0.08)	1.16 (0.06)	Hardash and Bjorhovde also reported on three other test series totaling 14 tests. These are not included herein.
Rabinovitch and Cheng (1993)	Gusset Plates	4	1.22 (0.07)	1.01 (0.06)	
Nast, <i>et al.</i> (1999)	Gusset Plates	3	1.35 (0.02)	1.04 (0.01)	
Udagawa and Yamada (1998)	Gusset Plates	73	1.18 (0.05)	1.04 (0.09)	Out of 219 test specimens, 73 failed by block shear. Three steel grades were investigated.
Swanson and Leon (2000)	Gusset Plate	1	1.18	0.97	
Ricles and Yura (1983)	Coped Beams	7	0.70 (0.09)	1.00 (0.13)	Two lines of bolts, number of bolts per line not necessarily equal, one test used slotted holes.
Aalberg and Larsen (2000)	Coped Beams	8	1.13 (0.08)	1.04 (0.18)	One line of bolts.
Yura <i>et al.</i> (1982)	Coped Beams	5	0.99 (0.19)	1.19 (0.19)	One line of bolts, one test used slotted holes, bolts spread over most of the beam web depth. Note large standard deviation associated with mean value.
Birkemoe and Gilmor (1978)	Coped Beam	1	0.95	1.17	One line of three bolts. Connected depth relatively small portion of beam depth.
Orbison <i>et al.</i> (1999)	Single Angles and Tees	12	1.12 (0.07)	1.06 (0.05)	One line of bolts.
Gross <i>et al.</i> (1995)	Single Angles	13	0.96 (0.05)	0.90 (0.07)	One line of bolts.
Barthel <i>et al.</i> (1987)	Single Angles	13	1.01 (0.01)	0.87 (0.04)	One line of bolts.
Epstein (1992)	Double Angles	3	0.80	0.80	Two lines of bolts. The standard deviation is not reported because only the average of the triplicate tests was available.

Notes: 1. Values of the ratio Test/LRFD greater than unity are conservative. LRFD value is calculated using resistance factor equal to 1.0.  
2. Number in parentheses is standard deviation.

tests (three tests each of five series) was it reported that block shear was the sole failure mode. Of these 15 tests, in only three was there no stagger between the two bolt lines. In all other cases the stagger present introduces another parameter in the strength equations. Consequently, it was the decision of the writers that only the non-staggered cases be included in the block shear examination.

Other test programs have also investigated block shear in single angle connections and structural tees with one line of bolts (Gross, Orbison, and Ziemian, 1995; Orbison, Wagner, and Fritz, 1999; Barthel, Peabody, and Cash, 1987). Tests on structural tees have been used to assess the effect of out-of-plane eccentricity inherent with bolted angles (Orbison *et al.*, 1999). Block shear failure of angle sections can be affected by out-of-plane and in-plane eccentricity. Although Orbison *et al.* (1999) found that out-of-plane

eccentricity was not a significant factor, Epstein (1992) concluded that the factor had to be considered in block shear calculations: in-plane eccentricity was found to be a significant factor. Tests at Bucknell University (Gross *et al.*, 1995; Orbison *et al.*, 1999) have shown that the block shear capacity decreases with an increase in eccentricity.

With the exception of the test results presented by Epstein (1992), the block shear capacity is predicted well by Equations 1 and 2. The equations overestimate Epstein's test results by 20 percent. Depending on the magnitude of in-plane eccentricity, the predictions can be either conservative (average test-to-predicted ratios of 1.12 and 1.01 observed by Orbison *et al.* (1999) and Barthel *et al.* (1987), respectively) or non-conservative (average test-to-predicted ratios of 0.96 and 0.80 observed by Gross *et al.* (1999) and Epstein (1992), respectively). It is not clear why the test

results by Epstein are overestimated by as much as 20 percent. Epstein has suggested that the correction for shear lag effect described in Section B3 of the AISC LRFD *Specification* should be applied to block shear failure. The writers believe that the use of the shear lag correction factor is not appropriate for block shear calculations since the failure plane in a block shear failure goes through only the component of the cross section that is connected. When considering angle and tee sections, the effect of out-of-plane load eccentricity may not be negligible. The current AISC LRFD design rules for block shear failure were derived from tests where eccentricity either was not present (e.g., gusset plate tests) or where eccentricity was strictly in-plane (e.g., tests on coped beams). Further research is required to investigate the effect of out-of-plane eccentricity on block shear failure.

## IMPROVED DESIGN EQUATIONS

### Gusset Plates

A good predictor of the ultimate strength of a gusset plate connection is obtained by adding the ultimate tensile strength (net tensile area) and the shear yield strength (gross shear area). This brings the predicted capacity much more closely into line with the test values. Furthermore, the predicted and observed failure modes are consistent. For the 109 gusset plate tests reported in Table 1, the ratio Test/LRFD is 1.07, standard deviation 0.08.

For an even better estimate of strength, the proposal made in Hardash and BJORHOLM (1985) can be used. The model proposed by these researchers uses net section tensile strength plus a shear strength component that reflects connection length. In the limit, short connections, the contribution from shear is nearly the same as that suggested here, i.e., shear yield acting on the gross shear area. It is the opinion of the writers that the existing AISC LRFD rule, Equations 1 and 2, is not a satisfactory model. It gives answers that are too conservative and it uses a failure mode (Equation 2) that is not demonstrated in the tests.

### Coped Beams

The mode of failure in coped beam webs is different than that of gusset plates. Because the shear resistance is present only on one surface, there must be some rotation of the block of material that is providing the total resistance. Although tensile failure is observed through the net section on the horizontal plane in the tests, as expected, the distribution of tensile stress is not uniform. Rather, higher tensile stresses are present toward the end of the web. The prediction of capacity given by Equations 1 and 2 is significantly non-conservative when there are two lines of bolts present.

If only one line is present, then the prediction is non-conservative for at least some cases.

As already noted, there are relatively few test results for block shear failure in coped beams. However, for these tests a satisfactory model is obtained using a capacity equal to one-half the tensile fracture load (net section on the horizontal plane) plus the shear yield load (gross section on the vertical plane). The test-to-predicted ratios and standard deviation obtained using this model are presented in Table 1. This model was first suggested by Yura and Ricles (1983). In addition, care should be taken to use generous end distances, particularly when slotted or oversize holes are present or when the bolts are distributed more-or-less from the top of the web to the bottom. If the latter detail is used, the bolt arrangement can carry appreciable moment and bolt forces may produce splitting between the bolts and the end of the beam web.

### Angles

As was the case for the coped beam connection, the shear resistance for an angle is present only on one surface of the potential block of sheared material. There are a number of complicating factors present in the angle connection as compared with the coped beam, however. It is found that the failure model suggested for gusset plates, i.e., tensile fracture of the tension surface followed by shear failure along the shear surface gives reasonably good results. This is also consistent with what is observed in the majority of tests. For the 41 test results on angles and structural tees presented in Table 1, the test-to-predicted ratio using the same rule as has been suggested here for gusset plates results in a value of 0.93 for this ratio, with a standard deviation of 0.05.

As seen in Table 1, the existing LRFD rules (Equations 1 and 2) give better agreement with the tests than the model recommended here. However, the writers consider that these equations do not provide a rational explanation for how the block shear phenomenon actually takes place.

## SUMMARY, CONCLUSIONS, AND RECOMMENDATIONS

This examination has identified that use of the LRFD Specification rules for block shear leads to conservative designs for gusset plates, non-conservative designs for coped beams, and satisfactory results for angles. Importantly, in most cases these rules do not reflect the mode of failure observed in the tests.

The writers recommend that the following equations for calculation of block shear resistance be used:

$$\text{Gusset plates, angles: } R_n = A_{nt}F_u + 0.6F_yA_{gv} \quad (3)$$

$$\text{Coped beam webs: } R_n = 0.5A_{nt}F_u + 0.6F_yA_{gv} \quad (4)$$

A resistance factor must be applied to Equations 3 and 4. The value  $\phi = 0.75$  is used in the current LRFD formulation. Although it is likely a conservative choice, further work must be done in order to establish a more appropriate value.

This review has identified the need for further studies of block shear. Work currently underway at the University of Alberta includes numerical modeling of the block shear resistance of gusset plate and angle connections and physical testing and numerical modeling of block shear in coped beams. The physical testing of coped beams will be done under controlled beam rotations, a feature not present in most of the tests reported in the literature.

### REFERENCES

- Aalberg, A. and Larsen, P. K. (2000), *Strength and Ductility of Bolted Connections in Normal and High Strength Steels*, Conference Proceedings, IMPLAST 2000, 4-6 October, Melbourne, Australia.
- American Institute of Steel Construction (AISC) (1986), *Load and Resistance Factor Design Specification for Structural Steel Buildings*, Chicago, IL.
- American Institute of Steel Construction (AISC) (1999), *Load and Resistance Factor Design Specification for Structural Steel Buildings*, Chicago, IL.
- Barthel, R. J., Peabody, M. T., and Cash, U. M. (1987), "Structural Steel Transmission Tower Angle and Rectangular Coupon Tension Testing," Western Area Power Administration Report, Department of Energy.
- Birkemoe, P. C. and Gilmor, M. I., (1978), "Behavior of Bearing Critical Double-Angle Beam Connections," *Engineering Journal*, American Institute of Steel Construction, Vol. 15, No. 4, Fourth Quarter.
- Epstein, H. I. (1992), "An Experimental Study of Block Shear Failure of Angles in Tension," *Engineering Journal*, American Institute of Steel Construction, Vol. 29, No. 2, Second Quarter.
- Gross, J. M., Orbison, J. G., and Ziemian, R. D. (1995), "Block Shear Tests in High-Strength Steel Angles," *Engineering Journal*, American Institute of Steel Construction, Vol. 32, No. 3, Third Quarter.
- Hardash, S. and Bjorhovde, R. (1985), "New Design Criteria for Gusset Plates in Tension," *Engineering Journal*, American Institute of Steel Construction, Vol. 22, No. 2, Second Quarter.
- Nast, T. E., Grondin, G. Y., and Cheng, J. J. R. (1999), "Cyclic Behavior of Stiffened Gusset Plate-Brace Member Assemblies," Structures Report No. 229, Department of Civil & Environmental Engineering, University of Alberta.
- Orbison, J. G., Wagner, M. E., and Fritz, W. P. (1999), "Tension Plane Behavior in Single-Row Bolted Connections Subject to Block Shear," *Journal of Constructional Steel Research*, Vol. 49.
- Rabinovitch, J. S. and Cheng, J. J. R. (1993), "Cyclic Behavior of Steel Gusset Plate Connections," Structures Report No. 191, Department of Civil & Environmental Engineering, University of Alberta.
- Ricles, J. M. and Yura, J. A. (1983), "Strength of Double-Row Bolted-Web Connections," *Journal of the Structural Division*, ASCE, Vol. 109, No. 1, January.
- Salmon, C. G. and Johnson, J. E. (1996), *Steel Structures, Design and Behavior*, 4th Edition, Harper Collins, New York, NY.
- Swanson, J. A. and Leon, R. T. (2000), "Bolted Steel Connections: Tests on T-Stub Components," *Journal of Structural Engineering*, ASCE, Vol. 126, No. 1, January.
- Udagawa, K. and Yamada, T. (1998), "Failure Modes and Ultimate Tensile Strength of Steel Plates Joined with High-Strength Bolts," *Journal of Structural Construction Engineering*, AIJ, No. 505, March.
- Yura, J. A., Birkemoe, P. C., and Ricles, J. M. (1982), "Beam Web Shear Connections: An Experimental Study," *Journal of the Structural Division*, ASCE, Vol. 108, No. ST2, February.

---

## ERRATA & ADDENDUM

# AISC LRFD Rules for Block Shear in Bolted Connections—A Review

Paper by GEOFFREY L. KULAK and GILBERT Y. GRONDIN  
(Fourth Quarter, 2001)

### ERRATA

On page 199, Equation 2 should be written as follows:

$$\begin{aligned} \text{and if} \quad & (0.6 \sigma_u) A_{nv} > \sigma_u A_{nt} \\ \text{then} \quad & R_n = (0.6 \sigma_u) A_{nv} + \sigma_y A_{gt} \end{aligned} \quad (2)$$

### ADDENDUM

After this paper had gone to press, Professor J. A. Yura pointed out to the authors in private correspondence that they had incorrectly interpreted some of the University of Texas test results (Yura, Birkemoe, and Ricles, 1982) as block shear. A few tests that the authors called block shear were, in fact, other failure modes. Also, some of the Texas

tests had been reported in two places, Yura et al. (1982) and Ricles and Yura (1983). Table 1, from the 4<sup>th</sup> Quarter 2001 paper, has been revised to reflect this information. In the entry for Aalberg and Larsen in Table 1, the ratio Test/Proposed was reported incorrectly in the paper, and this correction has been made. Additionally, a series of 17 tests done at the University of Alberta were completed after the paper had gone to press. These will appear as Franchuk, C., Driver, R. G. and Grondin, G. Y., "Block Shear Failure of Coped Steel Beams," *Proceedings*, 2002 CSCE Annual Conference, Montreal, June 2002. These tests have been added to Table 1, which greatly increases the data pool for coped beams. The number of coped beam tests in the 4<sup>th</sup> Quarter 2001 paper was 21 (really 19 because of the authors' mistake in accounting for the Texas data), and it is now 36.

The conclusions reached in the paper with respect to coped beams are still valid.

**Table 1 Revised—Block Shear Examination for Selected Cases**

Source	Type	No. Tests	$\frac{\text{Test}}{\text{LRFD}}$	$\frac{\text{Test}}{\text{Proposed}}$	Comments
Hardash and Bjorhovde (1985)	Gusset Plates	28	1.22 (0.08)	1.16 (0.06)	Hardash and Bjorhovde also reported on three other test series totaling 14 tests. These are not included herein.
Rabinovitch and Cheng (1993)	Gusset Plates	4	1.22 (0.07)	1.01 (0.06)	
Nast, et al. (1999)	Gusset Plates	3	1.35 (0.02)	1.04 (0.01)	
Udagawa and Yamada (1998)	Gusset Plates	73	1.18 (0.05)	1.04 (0.09)	Out of 219 test specimens, 73 failed by block shear. Three steel grades were investigated.
Swanson and Leon (2000)	Gusset Plates	1	1.18	0.97	
Ricles and Yura (1983)	Coped Beams	7	0.71 (0.08)	1.02 (0.10)	Two lines of bolts, number of bolts per line not necessarily equal, one test used slotted holes.
Aalberg and Larsen (2000)	Coped Beams	8	1.13 (0.08)	1.20 (0.24)	One line of bolts.
Yura et al. (1982)	Coped Beams	3	1.04 (0.10)	1.23 (0.13)	One line of bolts, one test used slotted holes, bolts spread over most of the beam web depth.
Birkemoe and Gilmor (1978)	Coped Beams	1	0.95	1.17	One line of three bolts. Connected depth relatively small portion of beam depth.
Franchuk et al. (2001)	Coped Beams	17	1.06 (0.12)	1.16 (0.07)	One and two lines of bolts with different spacing.
Orbison et al. (1999)	Single Angles and Tees	12	1.12 (0.07)	1.06 (0.05)	One line of bolts.
Gross et al. (1995)	Single Angles	13	0.96 (0.05)	0.90 (0.07)	One line of bolts.
Barthel et al. (1987)	Single Angles	13	1.01 (0.01)	0.87 (0.04)	One line of bolts.
Epstein (1992)	Double Angles	3	0.80	0.80	Two lines of bolts. The standard deviation is not reported because only the average of the triplicate tests was available.

- Notes: 1. Values of the ratio Test/LRFD greater than unity are conservative. LRFD value is calculated using resistance factor equal to 1.0.  
 2. Number in parentheses is standard deviation.

---

# DISCUSSION

## AISC LRFD Rules for Block Shear in Bolted Connections—A Review

Paper by GEOFFREY L. KULAK and GILBERT Y. GRONDIN  
(4th Quarter, 2001)

Discussion by MOHAN GUPTA and L. M. GUPTA

The authors have presented a comprehensive review of AISC LRFD rules for block shear. They have recommended a simple equation for predicting the block shear of gusset plates and angles. They have rightly observed that for angles, current LRFD rules give better agreement with the tests than the equation they have recommended.

They have included only one test result by Epstein (1992), although in five different results block shear was the sole mode of failure. The test-to-predicted ratio for this single result is reported as 0.8, and the paper states that it is not clear why the test results by Epstein are overestimated by as much as 20 percent. The reason is quite simple. There is a mistake in the computation of this value, and the correct value is 1.01. Probably, this mistake is because they have taken the gage distances from the toe of the angle, as

wrongly drawn in Figure 1 of the original paper (Epstein, 1992). The gage distances are taken from the heel of the angle, as is clear from the photographs in Figure 3 and computations done in the original paper.

The test-to-predicted ratios for all the five tests by Epstein (1992) for which block shear was the sole mode of failure are shown in Table 1. Most of these ratios are nearer to 1.00, reflecting a good correspondence between experimental results and predicted values.

### REFERENCES

Epstein H.I. (1992), "An Experimental Study of Block Shear Failure of Angles in Tension", *Engineering Journal*, AISC, Second Quarter, Vol. 29, No. 2, pp. 75 - 84.

**Table 1. Corrected Test-to-Predicted Ratios for Epstein (1992) Results**

Source	Specimen No.	Test - to - Predicted Ratio	
		AISC LRFD	Recommended
Epstein (1992)	1	0.87	0.87
	9	0.98	0.98
	<b>11</b>	<b>1.01</b>	<b>1.01</b>
	25	1.01	1.01
	37	1.08	1.08
	<b>Average</b>	<b>0.99</b>	<b>0.99</b>
	<b>Std. Dev.</b>	<b>0.07</b>	<b>0.07</b>

---

Mohan Gupta, lecturer, department of civil engineering, Bhilai Institute of Technology, Dur (C.G.) 491 001, India.

L.M. Gupta, professor and head, department of applied mechanics, Visvesvaraya Regional College of Engineering, Nagpur (M.H.) 440 011, India.

---

---

## CLOSURE

# AISC LRFD Rules for Block Shear in Bolted Connections—A Review

Paper by GEOFFREY L. KULAK and GILBERT Y. GRONDIN  
(4th Quarter, 2001)

Closure by GEOFFREY L. KULAK and GILBERT Y. GRONDIN

The writers of the Discussion on “AISC LRFD Rules for Block Shear in Bolted Connections—A Review” state that Epstein (1992) reports five tests for which block shear was the sole mode of failure, and these are listed by the writers in their Table 1.

First, each of Epstein’s reported results is the average of three individual tests. Thus, there were a total of 15 tests that involve block shear, not five. This was clearly pointed out in the authors’ paper, “AISC LRFD Rules for Block Shear in Bolted Connections—A Review”. Second, in these 15 tests, there was only one case, Epstein’s Connection No. 11, in which the bolts (placed on two lines) were not staggered. It was the decision of the authors to not include connections in which the holes were staggered because this introduces another parameter into the strength equations. This also is clearly stated in the paper. The authors’ position remains the same—only one data set (Epstein’s Connection No.11, three individual tests) should be used in the analysis and evaluation of block shear models for angles.

The second point made by the writers of the Discussion is that although the authors used the gage distances oriented as shown in Epstein’s Figure 1, they should have used the opposite orientation. The writers state that Epstein’s figure

is wrong, and that this is clear from the photographs of failed specimens, Epstein’s Figure 3. The authors observe that no Erratum to the Epstein paper was published.

There are three citations in the Epstein paper (Epstein, 1992) for the gage orientation: Figure 1, Figure 3 (photographs), and reference to use of “standard gages.” The first of these, which is what the authors used, appears to be in contradiction to the other two. It is not appropriate for the authors to “correct” the Epstein paper, but if the gage dimensions shown in Figure 1 are taken as measured from the heel of the angle and not from the toe, as shown in Figure 1, then the Test/LRFD ratio is 0.98 and the Test/Proposed ratio is also 0.98. This is a considerable improvement over the results calculated previously.

[*Editor’s Note:* An erratum to the paper “An Experimental Study of Block Shear Failure of Angles in Tension” by Howard I. Epstein is being published in this 4th Quarter 2002 issue of the *Engineering Journal*.]

### REFERENCES

- Epstein H.I. (1992), “An Experimental Study of Block Shear Failure of Angles in Tension”, *Engineering Journal*, AISC, Second Quarter, Vol. 29, No. 2, pp. 75-84.